

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Srikakulam**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

- I.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
<b>Total Rs.</b>											

- **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Vizianagaram**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**II. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Visakhapatnam**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**III.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- East Godavari**

**E.O.I Opening date**

**: Dt:13-12-2018 at 4.00 PM**

**IV.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**



## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- West Godavari**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**V. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Krishna**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**VI. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Guntur**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**VII. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Prakasam**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**VIII. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**



## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Nellore**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**IX.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Chittoor**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

- X.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
<b>Total Rs.</b>											

- **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Kadapa**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**XI.** Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**

## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Kurnool**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**XII. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
	<b>Total Rs.</b>										

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**

1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***

**AGENCY / SUPPLIER**



## SCHEDULE – A

**EMD Rs.50,000/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**E.O.I Schedule Cost Rs.1,200/- by way of DD in favour of Superintending Engineer(AM)Guntur**

**Expression of Interest No.04/SE(AM)GNT/Gokulam / Mini Gokulam/2018-19,Dt.29-11-2018 Schedules download start & Closing Dt:30-11-2018 To 13-12-2018 3.00PM.**

**E.O.I Receiving Last Date**

**Dt:13-12-2018 up to 3.30PM**

**Name of the District :- Ananthapur**

**E.O.I Opening date**

**Dt:13-12-2018 at 4.00 PM**

**XIII. Supply and erection of Animal Sheds (6, 4 & 2 animals) including GI pre painted sheet roofing at various places across the District for “MINI GOKULAM” under MGNREGS (Approx. 500 Nos. in each District).**

S.No.	Description	Material	6 animal sheds			4 animal sheds			2 animal sheds		
			Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount	Appx. Qty.	Rate	Amount
1	Supply and fixing of lean to roof for animal shed made up with 80x40mm of 2.60mm thick rectangular pipe for horizontal, members (3Nos. for 6 & 4 animals shed and 2 Nos. for 2 animal shed) and 4Nos. purlins with rectangular pipe of 50x50x2.60mm thick with necessary nuts and bolts of 16mm dia / 12mm dia and 4Nos. MS base plates for each member with a size of 200x200x10mm thick and necessary MS cleats of size 150x100x6mm thick and roofing with 0.50mm thick GI pre painted profile sheet fixed to the purlins with 14 size self drilling screws with neoprene washers with a total size of 9.30x4.30mts with necessary crimping including side closing of 1.20mt height along the length and sides are 50x50x2.60mm are proposed to be supported on 76 ODMS 3.20mm thick MS pipe including cost and conveyance of all materials and all labour charges for fabrication and other incidental charges and all taxes etc., complete for finished item of work.	MS pipe and Purlins	279.05 Kgs			234.17 Kgs			132.18 Kgs		
		Horizontal members	75.27 Kgs			75.27 Kgs			57.66 Kgs		
		Base plates and Cleats	46.20 Kgs			46.20 Kgs			30.80 Kgs		
		0.50mm thick GI pre painted profile sheet (TATA Make or JSW Make)	57.71 sqm			46.57 sqm			26.352 sqm		
		Bolts & Nuts (16 / 12 mm)	37.68 Kgs			37.68 Kgs			25.12 Kgs		
<b>Total Rs.</b>											

➤ **Note : The suppliers are requested to quote the rates for 2,4&6 animal sheds separately for each district by specifying the rates for above 5 items with a direction to calculate the quantities as per specification based on the enclosed plans.**

**AGENCY / SUPPLIER**

### **Mandatory:**



1. Copy of Registration / S.S.I registration.
2. Copy of GST Registration
3. Copy of PAN
4. E.M.D for **Rs.50,000/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Refundable**).
5. Schedule cost of **Rs.1,200/-** to be paid infavour of Superintending Engineer(AM)Guntur by way of Demand Draft (**Non-Refundable**).
6. The undersigned reserved the right to INCREASE OR DECREASE the No. of sheds as per time to time Government instructions.
7. Any other information is available at Superintending Engineer(AM),O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur, Cell No.9182361159.
8. The EOI received without fulfilling the above conditions shall not be considered for evaluation.
9. The quoted rates should be inclusive of all taxes and G.S.T will be effected as per time to time Government instructions.

### **Conditions:-**

1. The payment will be made as per the actual execution.
2. The agencies are certainly download the concerned District for which they are willing to execute the Gokulam works.
3. ***The payment will be made through online directly to credit their respective bank account after recording and enrolling the bills in NREGS portal subjected to the availability of G.O.I funds.***
4. The roofing sheet must be TATA / JSW make of 0.50 mm thick with guard film contains AZ 150 GSM.
5. The Department is having right to let out the work to anybody who opted for the lowest rates.
6. ***The schedule is valid for single district only.***
7. ***Interested suppliers / agencies are requested to down load the schedule from the “[market.ap.nic.in](http://market.ap.nic.in)” and quote their rates for 2,4&6 animal sheds separately for each district and sealed E.O.I along with E.M.D & schedule cost D.Ds. to be submitted (Tender Box) in the O/o Superintending Engineer (AM), O/o the Commissioner & Director of Agrl.Marketing, Govt. of A.P, Near Chuttugunta Center, Old Mirchi Yard, Guntur,before 13-12-2018 @3.30PM. For enquiries Cell No.9182361159.***


**AGENCY / SUPPLIER**

# 4 ANIMALS CATTLE SHED

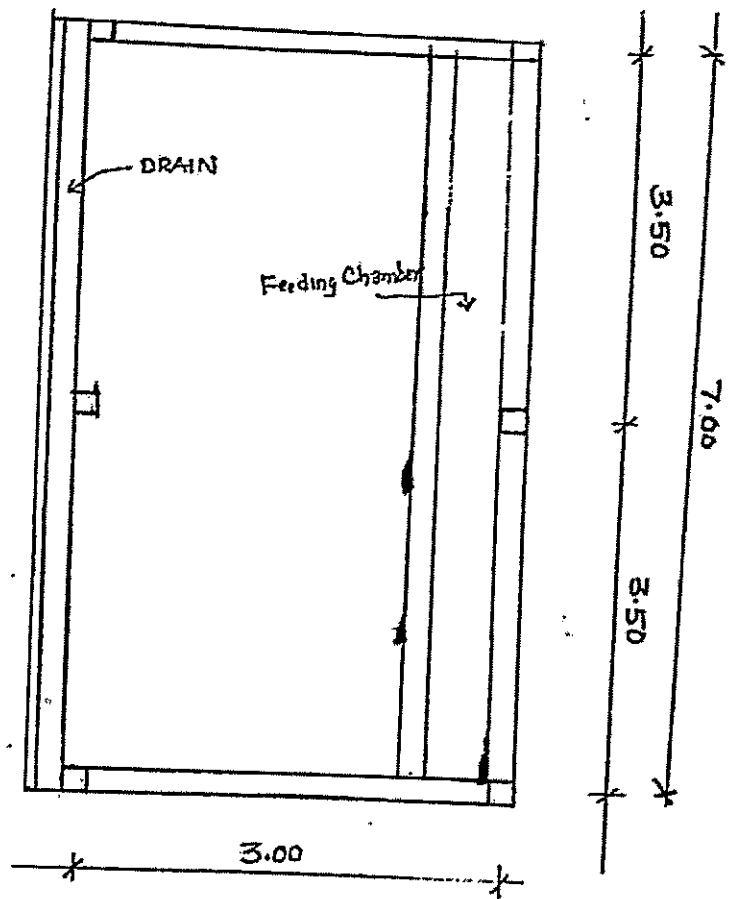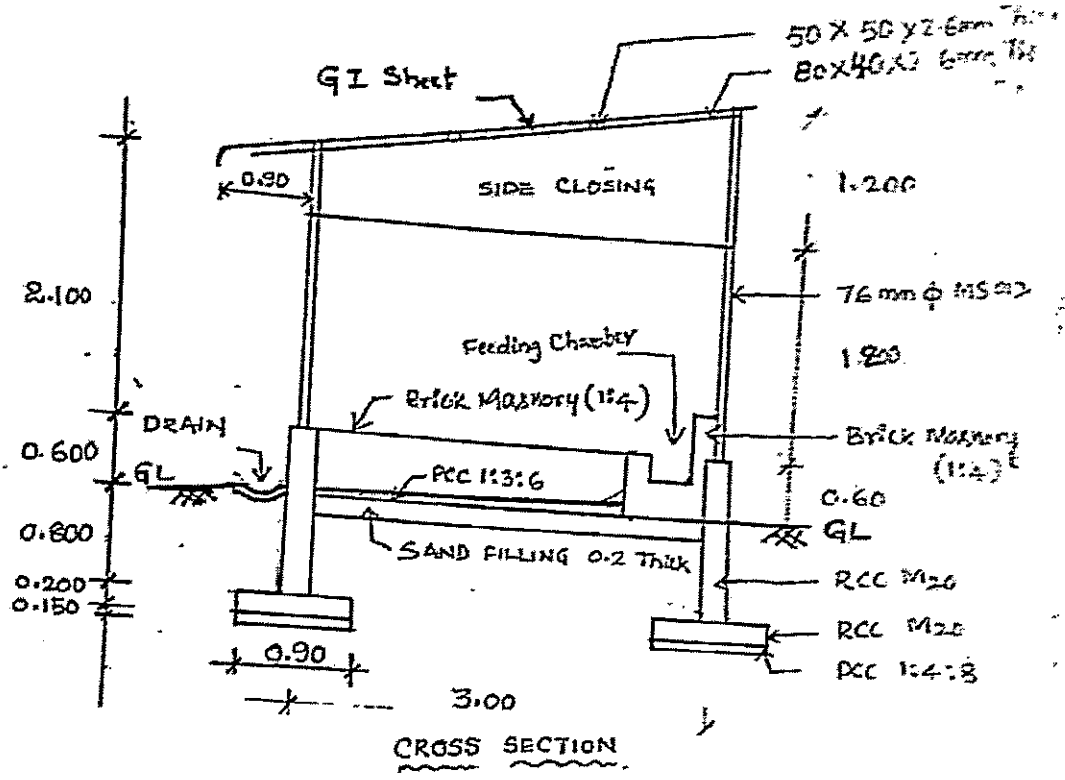


\* ALL DIMENSIONS ARE IN METERS  
 \* NOT TO SCALE

# 2 ANIMALS CATTLE SHED

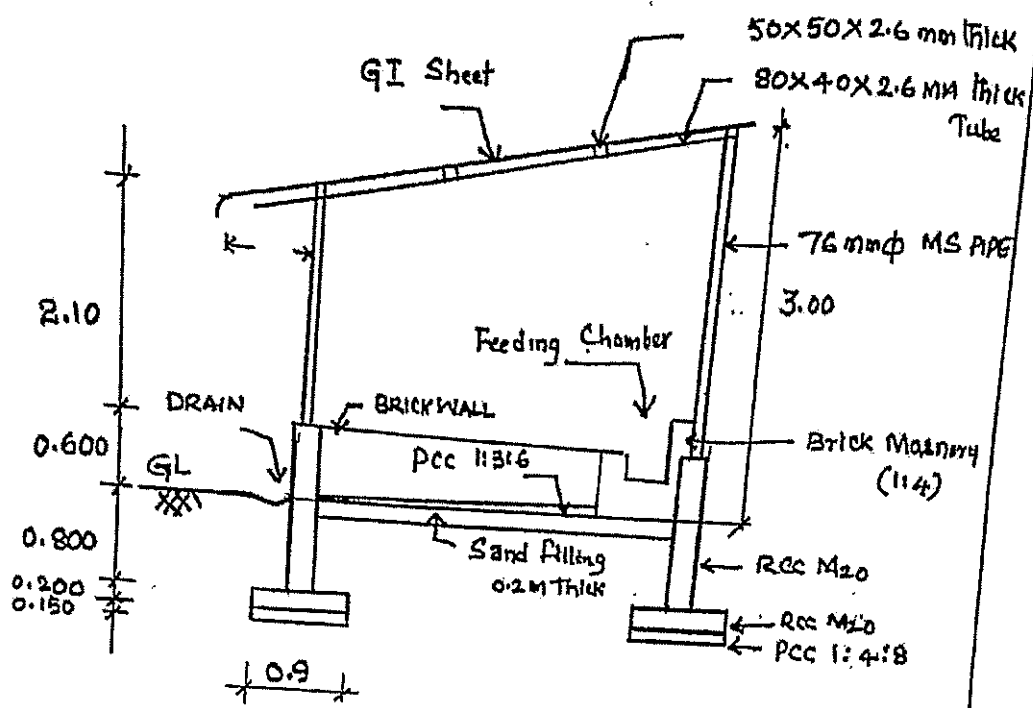



CROSS SECTION

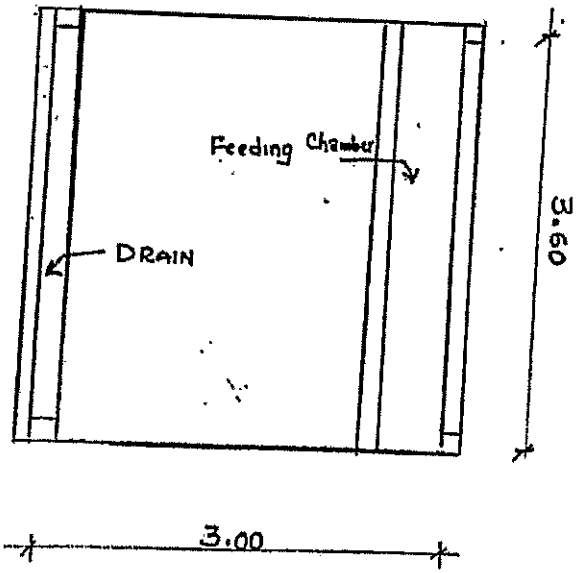

PLAN

\* ALL DIMENSION ARE IN METERS  
 \* NOT TO SCALE

# G ANIMALS CATTLE SHED

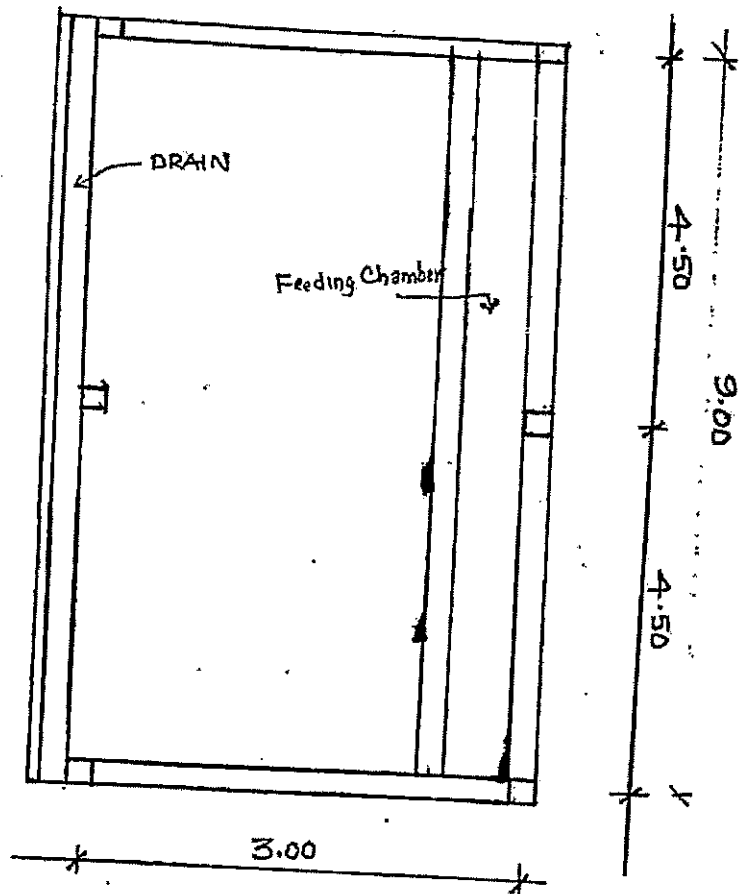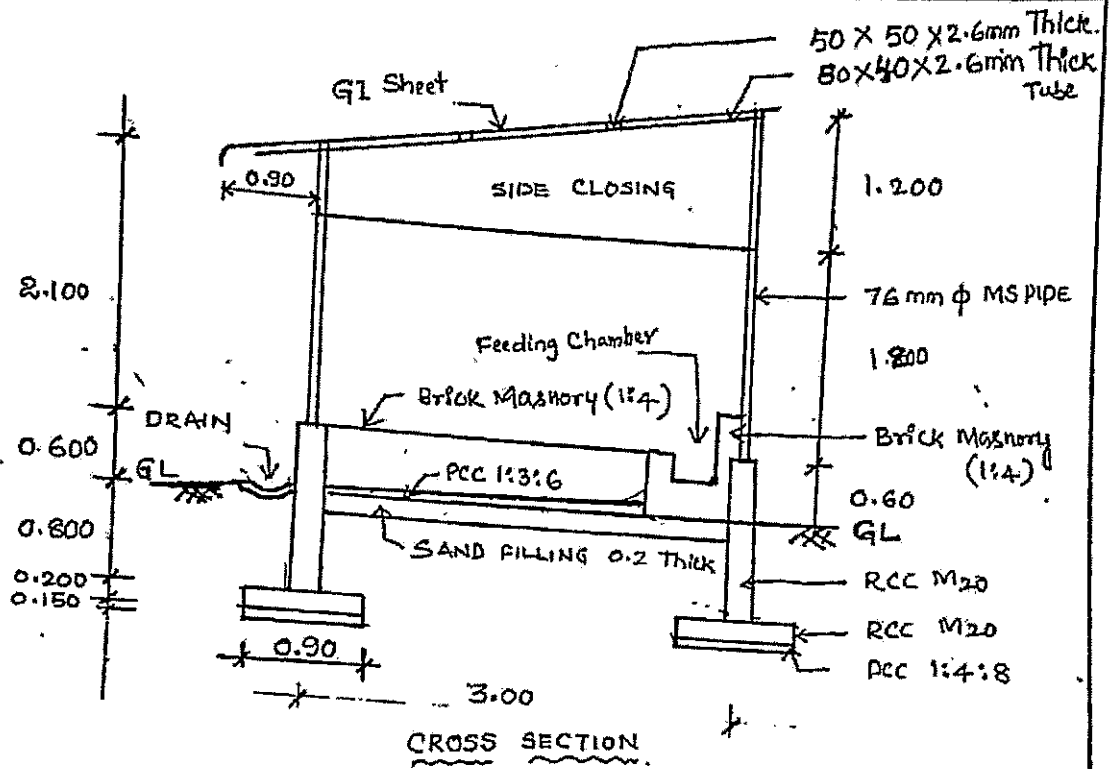

\* ALL DIMENSIONS ARE IN METERS

\* NOT TO SCALE